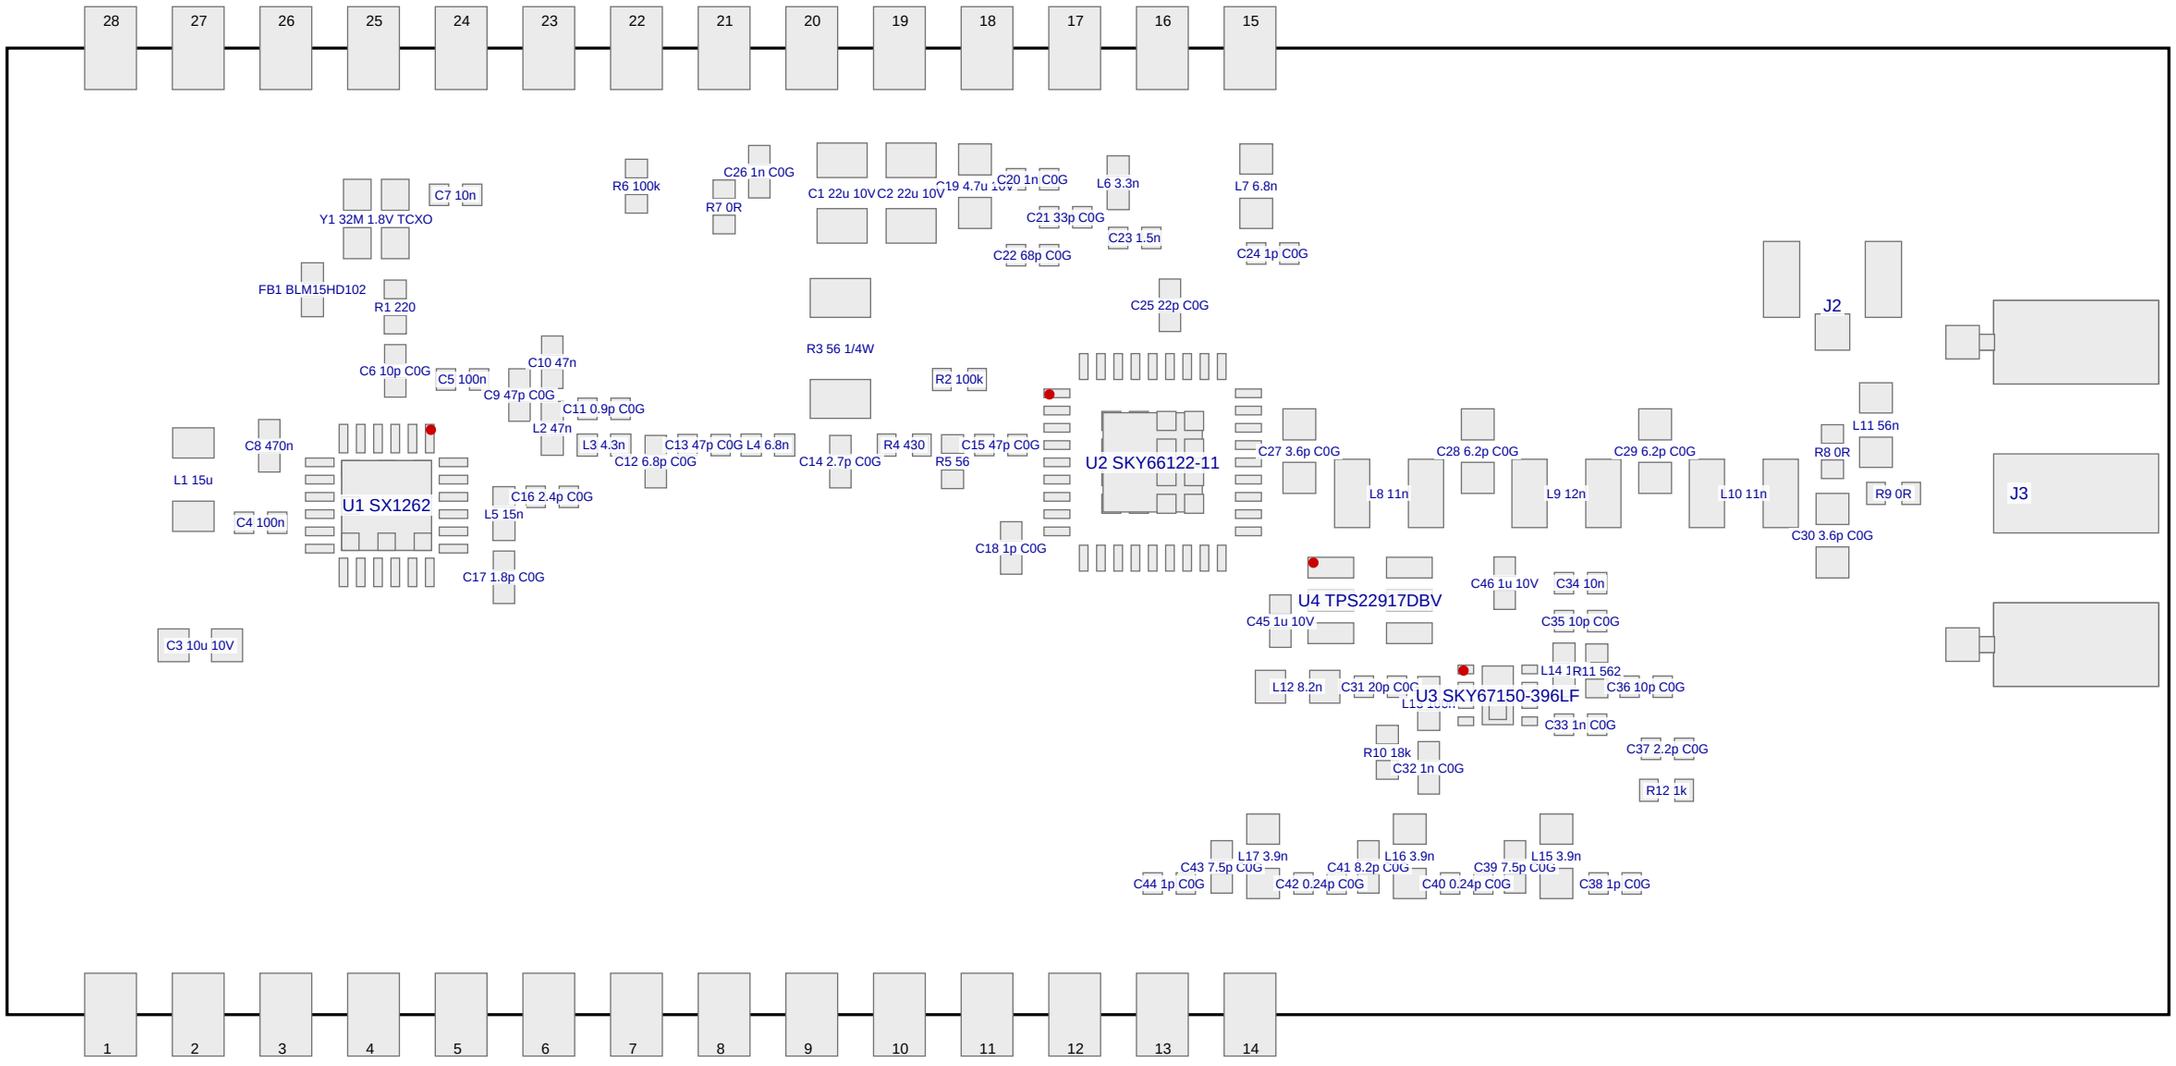


lora868_1w rev 2 - assembly, top side (all parts). Red dot = pin 1. U1 / U2 / U3 exposed pads: hot air or hot plate.

Order: U2 (FEM), U1, U3 first (flux, hot air), then U4 / Y1, 0402 RF parts, 0603 / 1206, J2 / J3 last. Fit R8 (U.FL) or R9 (SMA), never both.