
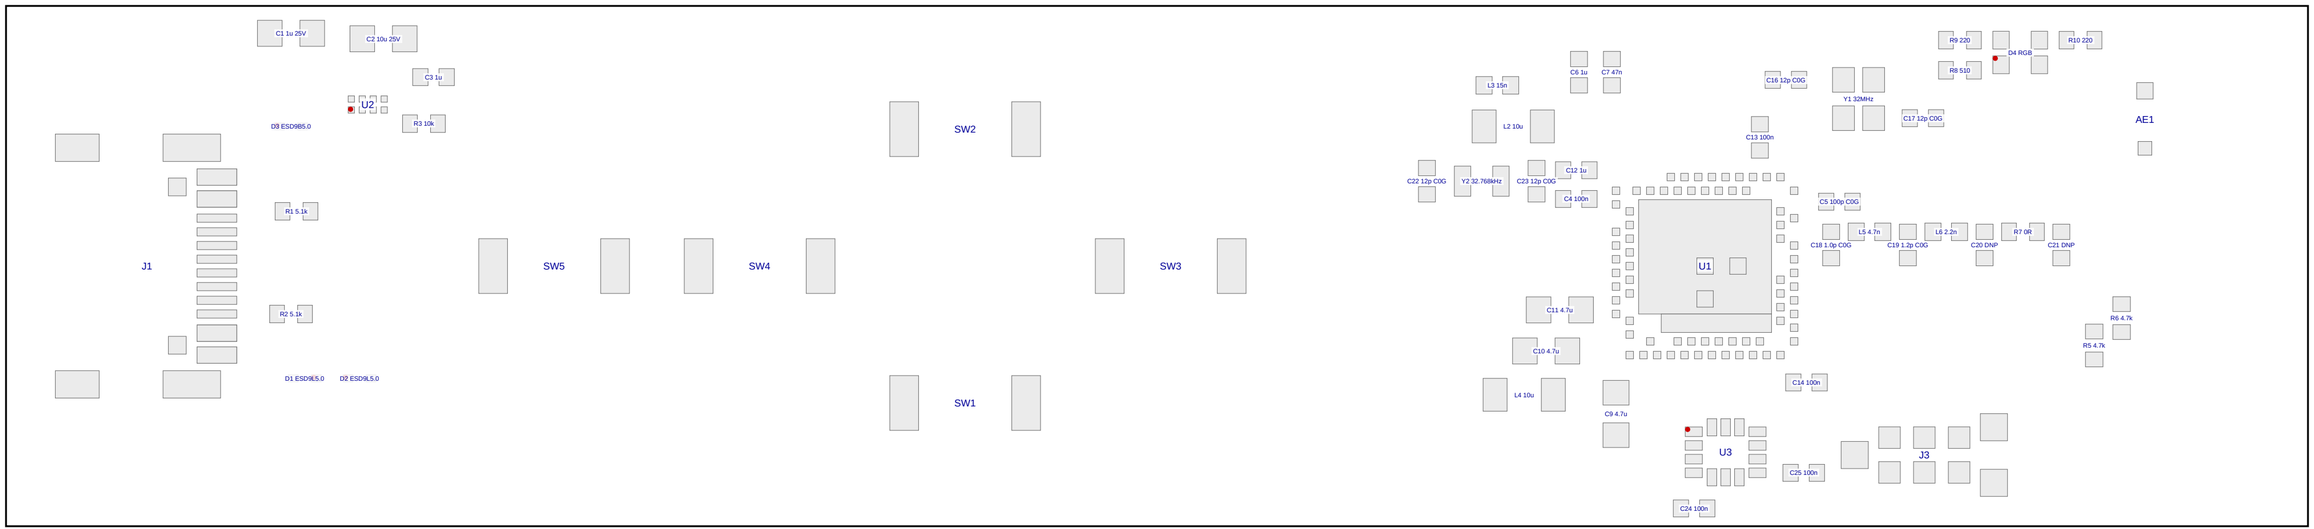


ble_air_presenter rev 2 - assembly, top side

Top side. Red dot = pin 1 / cathode. U1 (aQFN73, 0.5 mm) and U2 / U4 (0.4 mm WLP) need X-ray or AOI after reflow.

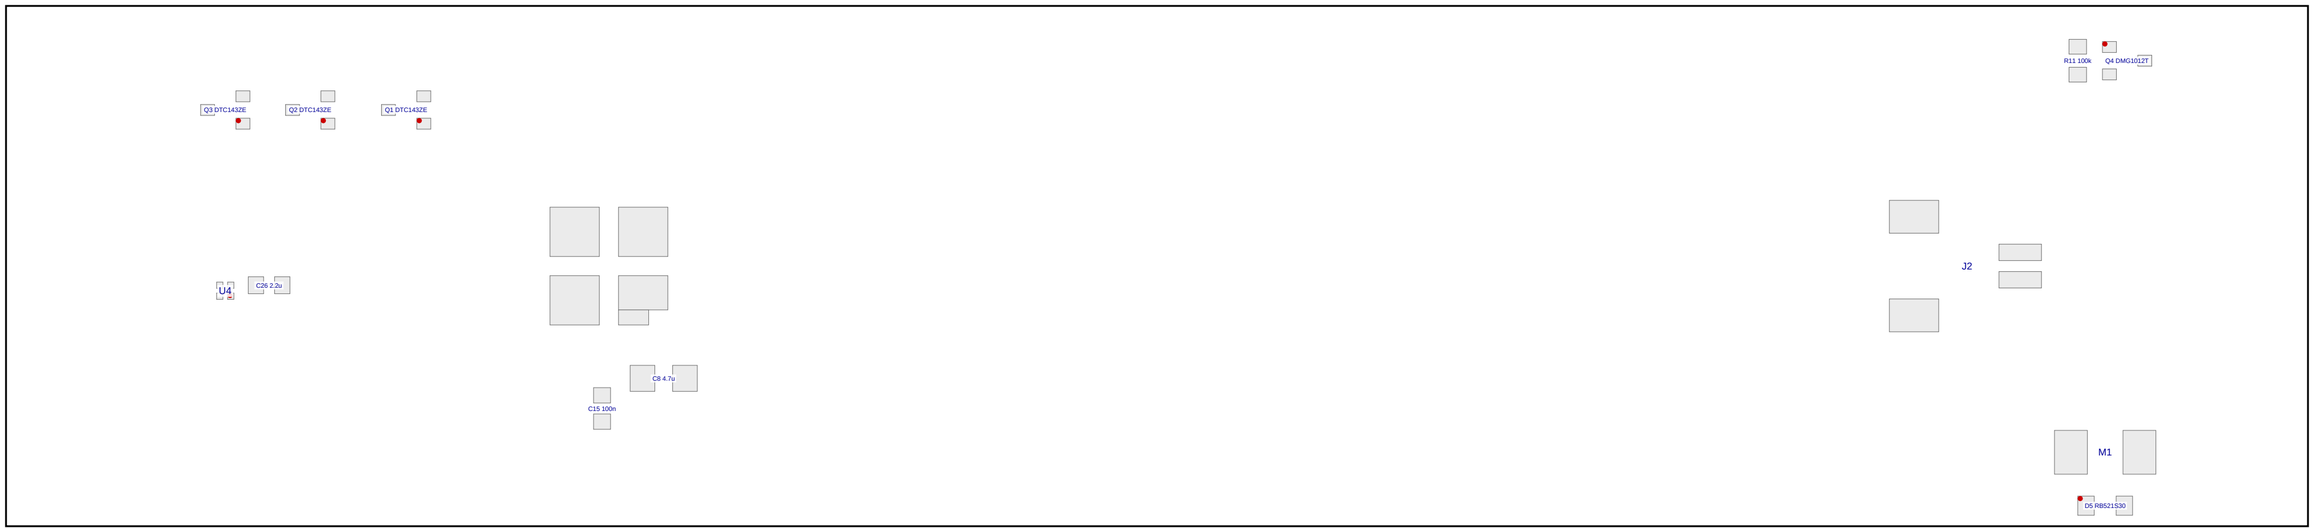

ble_air_presenter rev 2 - assembly, bottom side

Bottom side, seen from below. M1 = coin motor leads (hand soldered), J2 = cell (pin 1 = +), J3 = Tag-Connect TC2030-NL.